

Product Overview

- Adjustable height from 57 cm to 87 cm
- 2 liftable columns
- Trespa™ chemical resistant worksurface W67 x D65 cm
- Weight capacity: 250 kg
- Worksurface can easily be lifted up or down by commuting an electrical switch
- Worldwide electrical compatibility
- Recommended use with liquid chromatograph
- HPLC Ionbench is on caster wheels and can easily be moved
- Convenient access to the top of your HPLC or UHPLC
- Safe access to solvents

Liftable
motorized
worksurface



Control :




Standard switch

- Up and Down



Optional position display with 3 memories (ref : BCHPOS)

- Up and Down
- Memory function (3 in total)
- Display for height indication

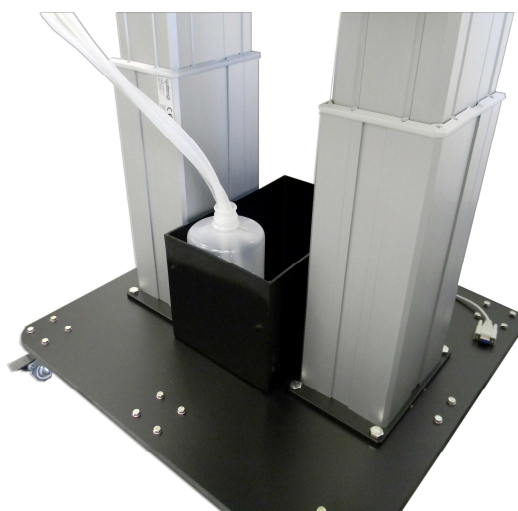

Solvent waste container (optional ref SOLV)



Slit for pipe and tubing



Handles



IEC power strip (optional ref IECKIT)

- including 8 IEC power cords

Physical dimension :

External Dimensions	BCHLC6765 cm
Depth	65 cm
Width	67 cm
Height	From 57 to 87 cm
Weight :	40 kg

Detailed Technical specifications :

- Compatible with 230V/50HZ or 110V/60HZ
- Electronic components are all compliant with RoHS directives (Restriction of Hazardous Substances Directive).

IonBench LC 6765



(optional)

IonBench MS



IonBench LC 6765



(optional)

IonBench MS



***With
integrated
noise
enclosure for
vacuum
pump***

Summary

Description	Part-number
Ionbench-LC BCHLC6765 / 220 Volt	BCHLC6765V220
Solvent waste container 300x200x200	SOLV
8 IEC plug 220 V 50 Hz, with cord	IECKIT
Optional position display with 3 memories	BCHPOS
IonBench MS	BCH85NE58

